




# General Electronic Devices

Makers of active and passive components  
 Quartz Crystal \* Oscillators \* Synthesizer \* Filters  
 Micro-Hybrid Assembly Services


## SMD914CA(E/D)-40.000MHz

THIS DEVICE IS RoHs COMPLIANT

| ELECTRICAL SPECIFICATIONS              |                                     |
|--|-------------------------------------|
| Type                                   | 9x14 mm "J lead" SMD Oscillator     |
| Frequency                              | 40.000MHz                           |
| Frequency Tolerance                    | $\pm 10\text{ppm}@25^\circ\text{C}$ |
| Frequency Stability                    | $\pm 100\text{ppm}$ All Inclusive   |
| Operating Temperature                  | 0 to $+70\text{degC}$               |
| Storage Temperature                    | $-55$ - $+125$ °C                   |
| Input Voltage                          | $5.0\text{V}\pm 10\%\text{VDC}$     |
| Input Current                          | 15 mA (Max)                         |
| CMOS OUTPUT:<br>"0" Level<br>"1" Level | 10%VDD (MAX)<br>90% VDD (MIN)       |
| Symmetry                               | 40% to 60% (at 50% VDD)             |
| Rise and Fall Time                     | 200 nS (MAX)                        |
| Tri-State Output (EN/MC)               | EN                                  |
| Output Load                            | 15pF                                |
| Start-Up Time                          | 5 ms (typical)                      |
| Aging Rate                             | + 3ppm/Year MAX                     |

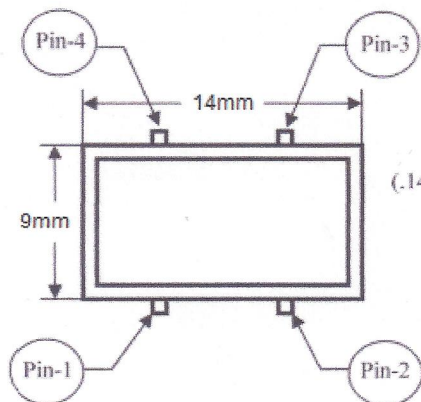

### DRAWING OUTLINE

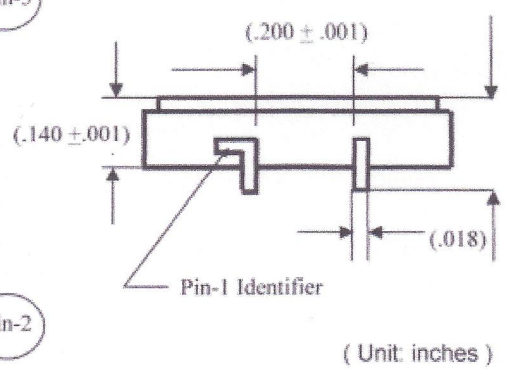

| PIN CONFIGURATION |        |
|-------------------|--------|
| Pin 1             | E/D    |
| Pin 2             | GND    |
| Pin 3             | OUTPUT |
| Pin 4             | VDD    |